




EXPERIENCE. TRU INNOVATION.

BMA INTERFACE

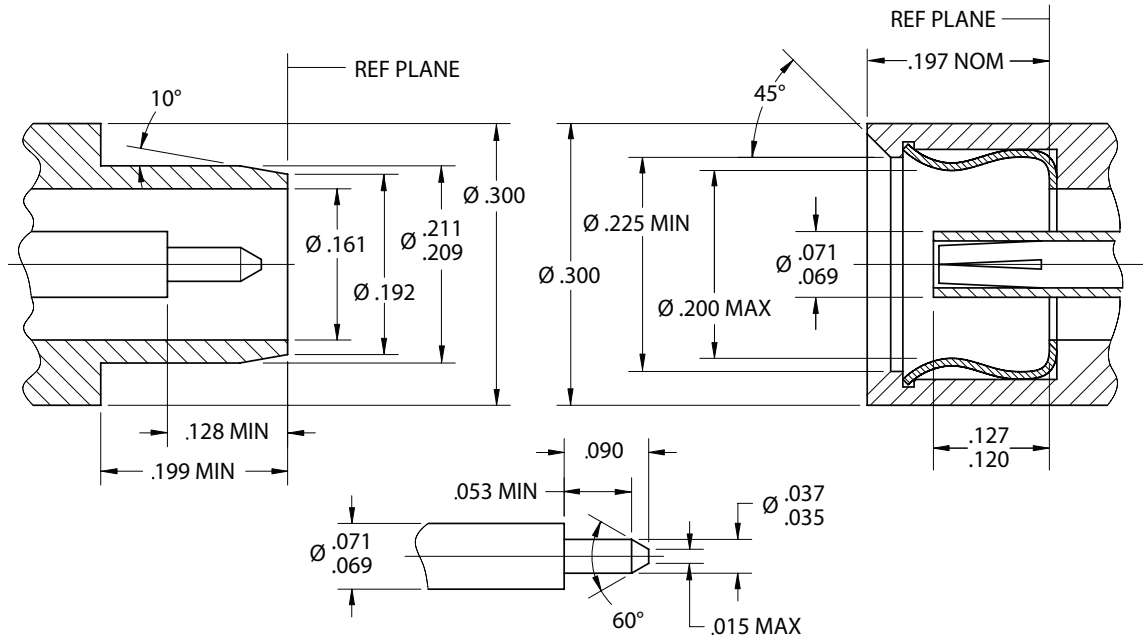

ELECTRICAL

Nominal Impedance	50 ohms
Frequency Range	DC to 18 GHz
Voltage Rating	335 volts rms
Dielectric Withstanding Voltage	1,000 volts rms

ENVIRONMENTAL

Temperature Range	-85°F to +257°F (-65°C to +125°C)
Vibration	MIL-STD-202 Method 204
Shock	MIL-STD-202 Method 213
Moisture Resistance	MIL-STD-202 Method 106
Corrosion (salt spray)	MIL-STD-202 Method 101

MECHANICAL

Mating Characteristics	per MIL-STD-348
Connector Durability	500 cycles min.
Recommended Torque	N/A (Push-on Blind-mate)

MATERIALS / FINISHES

Body	Brass, Silver or Nickel Plated. Stainless Steel, Passivate
Contacts (Inner)	Female: Beryllium Copper, Silver or Gold Plated. Male: Brass, Silver or Gold Plated
Contacts (Outer)	Brass, Silver or Nickel Plated
Contacts (Slotted)	Beryllium Copper, Silver or Nickel Plated
Insulators	Teflon
Gaskets & Seals	Silicone Rubber

TRU Corporation