




EXPERIENCE. TRU INNOVATION.

# LT INTERFACE

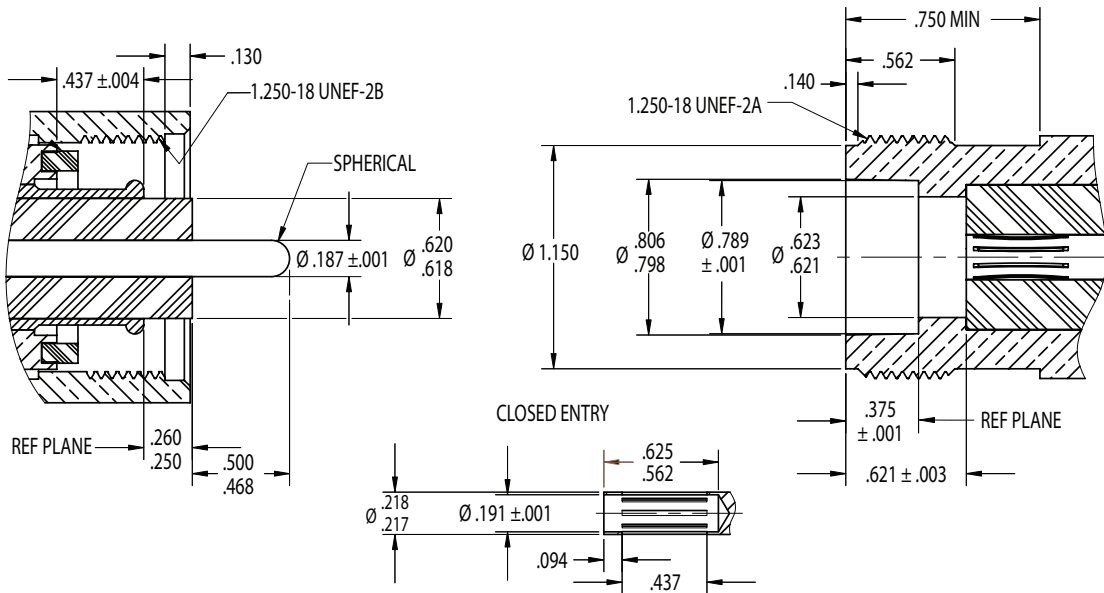

### ELECTRICAL

Nominal Impedance	50 ohms
Frequency Range	DC to 1 GHz
Voltage Rating	5,000 volts rms
Dielectric Withstanding Voltage	4,000 volts rms

### ENVIRONMENTAL

Temperature Range	-85°F to +329°F (-65°C to +165°C)
Vibration	MIL-STD-202 Method 204
Shock	MIL-STD-202 Method 213
Moisture Resistance	MIL-STD-202 Method 106
Corrosion (salt spray)	MIL-STD-202 Method 101

### MECHANICAL

Mating Characteristics	per MIL-C-26637 or MIL-STD-348
Connector Durability	500 cycles min.
Recommended Torque	75 in-lbs nominal

### MATERIALS / FINISHES

Body	Brass, Silver or Nickel Plated
Contacts (Inner)	Female: Beryllium Copper, Silver or Gold Plated. Male: Brass, Silver or Gold Plated
Contacts (Outer)	Brass, Silver or Nickel Plated
Contacts (Slotted)	Beryllium Copper, Silver or Nickel Plated
Insulators	Teflon
Gaskets & Seals	Silicone Rubber

TRU Corporation